




Made for first. Built to last.

DISCLAIMER:

PRODUCTS MADE BY L AND W FAB AND MACHINE INC. ARE INTENDED TO FIT YOUR STOCK UTV UNLESS OTHERWISE SPECIFIED. INSTALLING, MODIFYING, OR REMOVING ANY COMPONENTS (FACTORY OR AFTERMARKET) NOT SUPPORTED BY L AND W AND THE INSTRUCTIONS HEREIN WILL VOID YOUR WARRANTY. FOR MORE INFORMATION ON INSTALLATION, WARRANTY, OR PRODUCT USE PLEASE CALL US AT (770) 445-9778

24+ xp 2 seat tree kickers

Fitment: 2024-CURRENT RZR XP 1000 2 SEAT

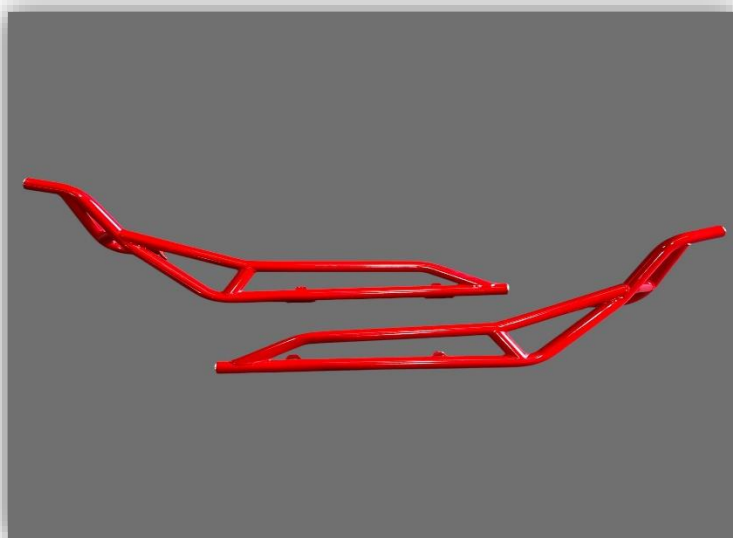

INSTALLATION MANUAL

Parts List:

Item #	Part #	Description	Qty.
1	N/A	Tree Kicker	2
2	N/A	Plastic Pipe Cap	6
3	N/A	3/4x1 hex bolt	6
4	N/A	1/2in Nylock Nut	6
5	N/A	1/2in Washer	12
6	N/A	1/2in lock washer	6
7	N/A	FRONT MOUNT PIN	4
8	N/A	REAR MOUNT PIN	2

Tools:

Tool	Qty.
10mm socket	1
¾ wrench	1
Vise grips/adjustable wrench	1
Rubber Mallet	1
T40 WRENCH	

Installation:

STEP 1:

Lay out the supplied parts and hardware shown on the parts list. Begin by installing the plastic pipe caps on the 4 open ends on your tree kickers. These can be difficult to get in by hand, so our recommendation is to push them into the pipe end until the first ring is pushed in then quickly grab a rubber mallet and gently tap the cap in until it is flush.

STEP 2:

Using a 10mm socket and T40 wrench, remove the factory skid plate. It is necessary to remove skid plate to access back side of frame for installing mounting pins. Figure 1.

Figure 1



STEP 3:

Refer to figures 2-5 for installation of the mount pins. The rear pins have the longer shoulder.

Figure 2



Figure 6



Step 7:

Place tree kicker on mounts, use provided flat washer and locknut. Tighten the 2 lower nuts completely before tightening the rear upper nut.

THANK YOU FOR CHOOSING L&W FAB!

