



**MADE FOR FIRST. BUILT TO LAST.**

DISCLAIMER:

PRODUCTS MADE BY L AND W FAB AND MACHINE INC. ARE INTENDED TO FIT YOUR STOCK UTV UNLESS OTHERWISE SPECIFIED. INSTALLING, MODIFYING, OR REMOVING ANY COMPONENTS (FACTORY OR AFTERMARKET) NOT SUPPORTED BY L AND W AND THE INSTRUCTIONS HEREIN WILL VOID YOUR WARRANTY. FOR MORE INFORMATION ON INSTALLATION, WARRANTY, OR PRODUCT USE PLEASE CALL US AT (770) 445-9778

## POLARIS RZR CUP HOLDER

FITMENT: 2019+ RZR XP/TURBO AND 2018+ TURBO S




INSTALLATION MANUAL

# PARTS LIST:

Item #	Part #	Description	Qty.
1	N/A	Main Body	1
2	N/A	Attachment Arm	1
3	N/A	Cups	2
4	N/A	Screws	2
5	N/A	5/16 Bolt	1
6	N/A	5/16 Washers	2
7	N/A	5/16 Nut	1

# TOOLS:

Tool	Qty.
1/8 Hex Key	1
1/2 Wrench	2

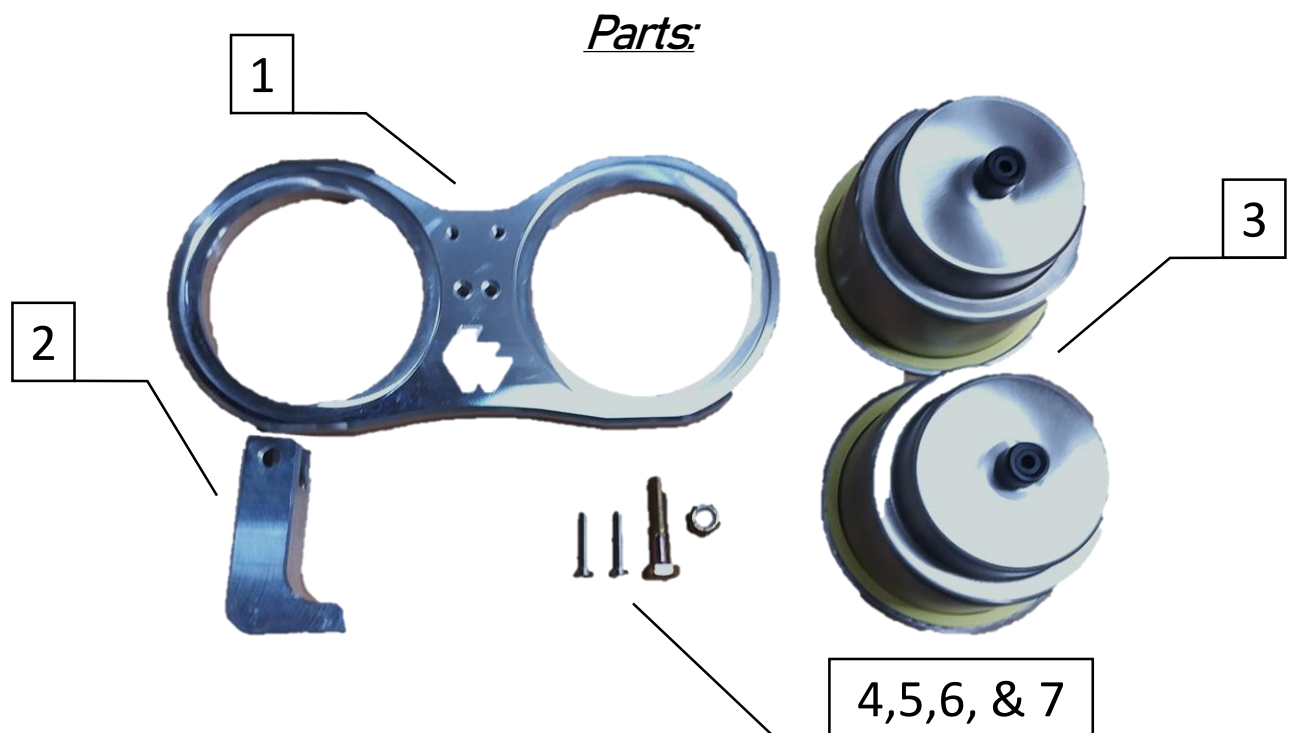

# INSTALLATION:

**STEP 1:** Begin by arranging your parts as shown on the parts page. Grab a hold of your main body, attachment arm, and allen head screws. Mount the attachment arm on the underside of the main body facing away from the front as shown in *figure 1* using the two allen head screws. Tighten these screws completely at this time.

Figure 1



**STEP 2 (OPTIONAL):** When installing the cups to the main body it can be useful to utilize a small amount of oil based lubricant. By putting a small dollop of oil on a rag and rubbing it around the outer body of the cups it may help them install easier.

**STEP 3:** Grab the two cups that come in the kit and remove the protective layer on the adhesive around the rim shown in *figure 2*. Once it has been removed shimmy the cups into the top rings of the main body until they are snug and the adhesive ring has bonded to the body. The finished assembly should look just like the one shown in *figure 3* below.

Figure 2

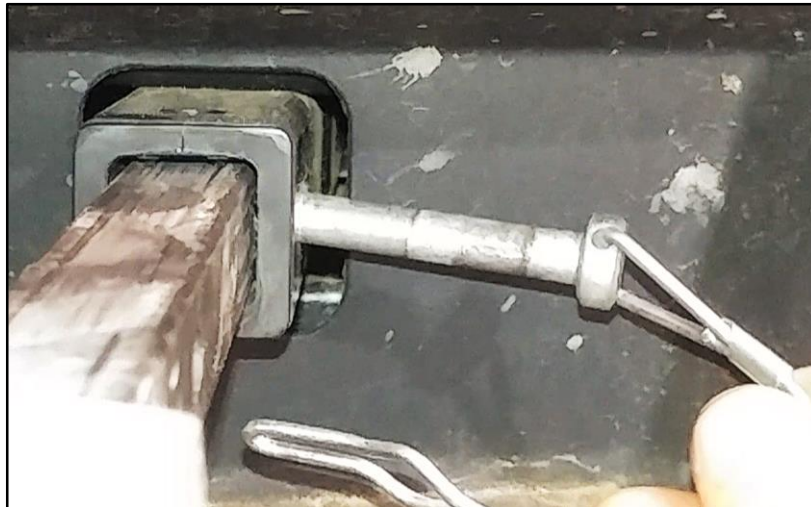


Figure 3



**STEP 4:** Bring the cup holder assembly to the passenger side of your RZR and locate the grab bar at the front of the cabin. On the back of the grab bar there is a pin with a spring collar as shown in *figure 4*. Remove the pin and pull the bar outward so at least 2 holes are showing and test mount the cup holder on one of the holes. Once you are satisfied with the placement and length of the grab bar put the pin back in the last hole.

Figure 4



**STEP 5:** Once the Grab bar has been adjusted to your liking the cup holder can be mounting on your chosen hole using the 5/16 hardware supplied with the kit. Tighten this down completely and ensure it is snug and non-moving. Once this is tightened the installation is now finished. The final assembly should resemble *figure 5*.

Figure 5



TEMPLE, GA 30179



(770) 445-9778

**THANK YOU FOR CHOOSING L&W FAB AND MACHINE INC!**